



# ONVIF 2 Megapixel Vandal Dome

IP Camera



IP Surveillance

## iMPIRFD-2SN2

NEW V1.0



- Sony Exmor 1/2.8" CMOS Image Sensor.
- Real-time H.264, MJPEG Compression(Dual Codec).
- Resolution : 1920 x 1080.
- Simultaneous Multiple Streams.
- 12 IR LEDs, IR Range 15M.
- Supports ONVIF Standard to Simplify Integration and Enhance Interoperability.



# iMPIRFD-2SN2 2 Megapixel Vandal Dome IP Camera





## function cable



1. RCA
2. DC12V input
3. RJ-45 Ethernet LAN Port


Dimension Unit: mm

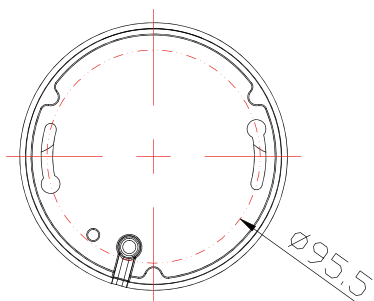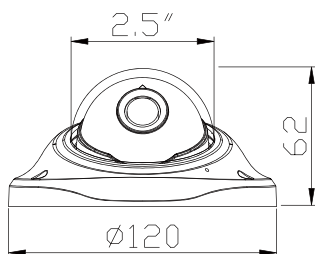

## SPECIFICATIONS

|                            |  |   |
|----------------------------|--|---|
| System                     | Flash : 16MB   |   |
|                            | RAM : 128MB  |   |
| Image Sensor               | FullHD High Quality 1/2.8" Sony Exmor CMOS Image Sensor  |   |
| Sensitivity                | 0 Lux (IR ON)  |   |
| IR LEDs                    | 12PCS  |   |
| IR Range                   | 15M  |   |
| Lens                       | Board Lens 3.6 mm F1.8   |   |
|                            | Removable IR-cut filter for day & night function   |   |
| Video                      | H.264: 1920x1080 @25fps  |   |
|                            | H.264: 1280x720 @30fps   |   |
|                            | H.264: 640x480 @30fps  |   |
|                            | Compression: H.264, MJPEG Streaming: Dual Codec (H.264 · JPEG) Selectable<br>Support Simultaneous multiple streams |   |
| Image Settings             | Adjustable image size, quality, and bit rate   |   |
|                            | Time/Date stamp and text caption overlay.  |   |
|                            | Configurable brightness, contrast, saturation, sharpness, white balance and exposure                               |   |
|                            | AGC / AWB / AES / BLC / WDR  |   |
| Networking                 | Interface  | 10/100 Mbps Ethernet, RJ-45               |
|                            | Supported Protocol   | IPv4, TCP/IP, DHCP, HTTP, RTSP, SNTP, DNS |
|                            | Supported Browser  | Microsoft Internet Explorer 6.0 or above  |
| Alarm and Event Management | Motion Detection<br>Event notification using SMTP or FTP   |   |
| Users                      | 8 clients on-line monitoring at the same time<br>Multi-level user access control with password protection          |   |
| Maintenance                | Supports online firmware upgrade   |   |
| I/O                        | RJ-45 Ethernet x 1, DC Jack x 1  |   |
| Power                      | DC12V or PoE IEEE802.3af Class 0   |   |
| Max. Power Consumption     | 3.6W(IR OFF), 7W(IR ON)  |   |
| Weight                     | Netweight: 450g  |   |
| Dimension                  | Φ120 x 60 mm   |   |
| Operating Environments     | Temperature: 0 ~ 45 °C   | Humidity: 90%                             |

★Product specifications are subject to change without notice; please contact us for the latest information.

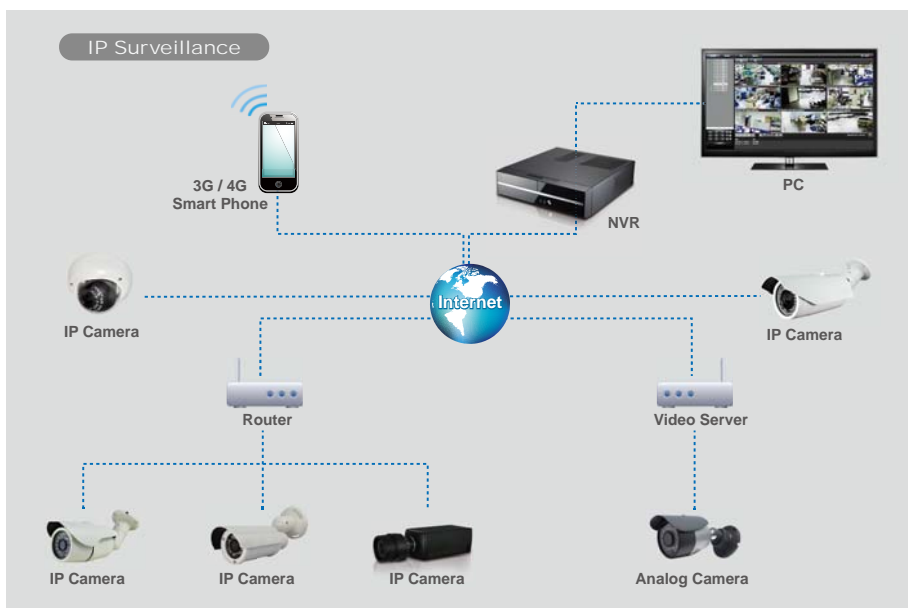

iLink Professionals, Inc.  
4025 Pleasantdale Road, Suite 550, Atlanta, GA 30340 USA TEL:1-678-206-5465