

Four in One Camera


HD Analog Signal AHD, TVI, CVI, CVBS
switch by OSD



Specifications

Model NO.	iHDIRDFIO-5SN
Video Output Mode	AHD 5M/TVI 5M/CVI 4M/CVBS
Camera	
Image Sensor	Sony IMX326
Image Resolution	5.0 MP
Effective Pixels	5M:2592*1944 ; 4M:2560*1440
TV System	PAL/NTSC
Video Output Mode	AHD:5M@20fps/12.5fps,4M@30fps/15fps; TVI:5M@20fps/12.5f
Electronic Shutter	1/25s~1/50,000s , 1/30s~1/60,000s
S/N Ratio	≥50dB
Scanning System	Progressive Scan
Lens	
Focus Length	Board Lens 3.6mm
Focus Control	Fixed
Lens Type	Fixed
Pixels	5M Pixels
Auto Iris Support	N/A
Night Vision	
Infrared LED	42μ x 1PCS
Infrared Distance	20M
IR Status	Under 10 Lux by CDS
IR Power On	CDS Auto Control
Camera Features	
Starlight	/
Day/Night	YES
OSD Menu Language	YES
White Balance	AUTO / MANUAL
Gain Control	AUTO
Noise Reduction	DNR
Picture TVjustment	YES
WDR	DWDR
OSD Support	YES
Dip Switch	N/A
General	
Waterproof	N/A
Dual Voltage	N/A
IR Cut Filter	YES
Heater	N/A
Audio	N/A
Operation Temperature	-10℃ ~ +50℃ RH95% Max
Storage Temperature	-20℃ ~ +60℃ RH95% Max
Power Source	DC12V±10%,550mA
Dimension	ø 94 x 69(H) mm
Weight	500g

Mode switch by OSD

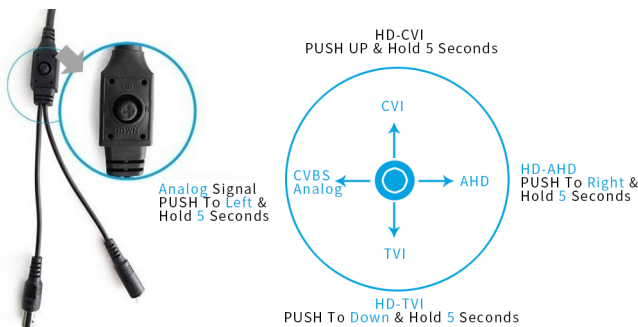

Multi-function

2D/3D-NR



Defog



DWDR

